



INFORMATION



SEGMENTS
LCD DISPLAY



UP TO
100 PLUs




RS-232



INTERNAL
RECHARGEABLE
BATTERY (opt.)



METROLOGICAL
VERIFICATION
OPTIONAL (EU)

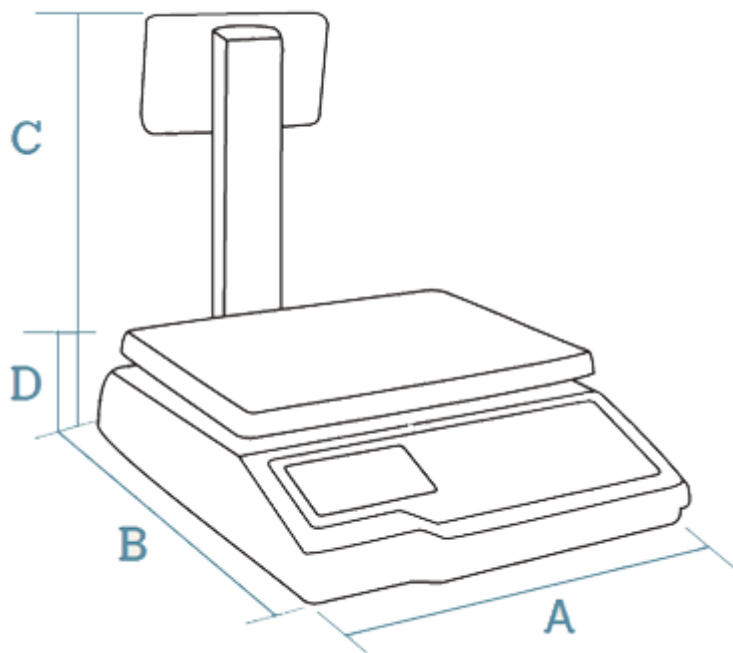

Data in mm

A	320
B	400
C	356
D	116

Plate dimensions: L305 x W235 mm.

Weight with packaging: 6.0 kg.

MAIN CHARACTERISTICS

- Price computing electronic scale without printer.
- RS-232 interface: firmware and communication protocols upgradeable from PC.
- Internal rechargeable battery:

- Up to 120 hours of life with completely charged battery and back lighting disconnected (approximate data).
- **Valid for legal metrology.**

FEATURES

- **EAN heading programming (according to communication protocol).**
- **Tare, fix tare and manual zero.**
- **Fix price: to operate several times with the same article.**
- **Display of price in a secondary currency.**
- **Energy saving via programmable on and off back lighting switching and automatic disconnection.**

CAPACITY / ACCURACY

- **Multi-range (3,000 divisions): 6 kg / 2 g - 15 kg / 5 g.**
- **Optional:**
 - Multi-range (3,000 divisions): 15 kg / 5 g - 30 kg / 10 g.

AVAILABLE FORMATS

- **Flat and pole in the same scale: the tower is included in the packaging and is easily installable.**

CONSTRUCTION

- **Structure:**
 - ABS plastic casing.
 - **Displays:**
 - 5 digits backlit LCD segment display in vendor and buyer side.
 - Show weight, price / kg and total.
- **Keypad with 32-keys.**
- **Plate:**
 - Type: Flat.
 - Material: Stainless steel.

COMMUNICATION TO PC / POS / ECR

- **RS-232 interface.**
- **Communication protocols available for the main POS and ECR in the market.**
- **Multi-protocol: communication protocol is selected in the scale (40 protocols available).**
More protocols can be added from PC by telecharge (maximum: 60 protocols more).
- **“OPOS” driver.**

POWER SUPPLY

- **Mains: 220 VAC with AC/DB 12 V / 500 mA adapter.**
- **6 VDC / 4.5 Ah rechargeable internal battery available (only in G-325 B F/P) and connection to external battery.**

ENERGY CONSUMPTION

- G-325: 3 W (approx.).
- G-325 B: 3.5 W (approx.).

OPTIONS

OPTION	CHARACTERISTICS	REFERENCE
Capacity 6 kg / 2 g - 15 kg / 5 g	Multi-range (3,000 divisions).	...E __ (*)
Capacity 15 kg / 5 g - 30 kg / 10 g	Multi-range (3,000 divisions).	...F __ (*)
Metrological verification (M)	According to EU weighing directives.	Consult

(*)

The scale references with this capacity are obtained by replacing the last characters of the reference for the standard scale with the indicated ending.

ACCESSORIES



ITALIAN PLATE

L357 x W235 x H55 mm.

The Italian plate is placed on the flat plate. A new weight adjustment might be necessary.



Astintze, 26
48160 Derio (Vizcaya) Spain
T. (+34) 94 452 15 10
E. dibal@dibal.com